



FG-NS-10-HH Fats & Grease Trap designed to IS EN 1825 Volume 5,000 lit

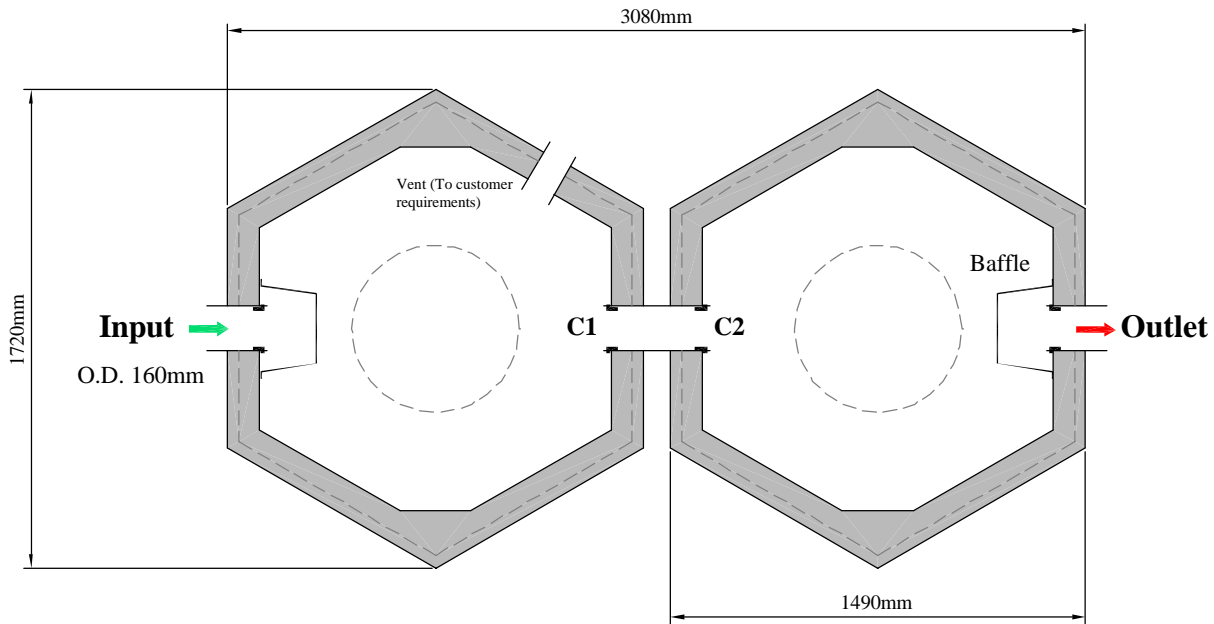

10 l/s nominal flow @ >50C
1,200 lit. Grease retention
1,200 lit. sludge capacity

An anti-syphon vent is required for long run outflows

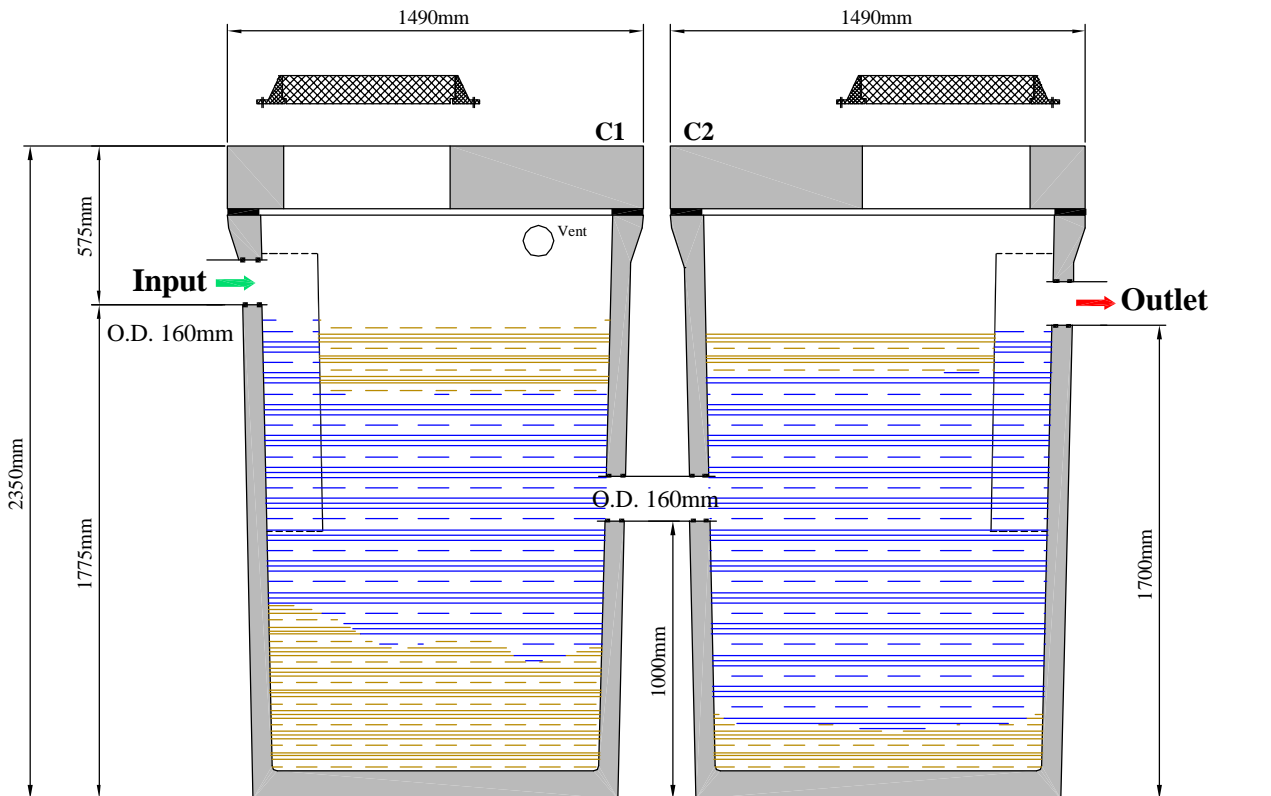

All tanks must be placed on a perfectly level and firm suitable base.

This drawing is ©. All rights reserved.

E-mail: info@molloyprecast.com
 Web: www.molloyprecast.com



Molloy Precast Products Ltd.
 Coleraine, Clara Road,
 Tullamore, Co.Offaly.
 Tel: 05793 26000
 Fax: 05793 26060

Grease Trap: FG-NS-10-HH Fats & Grease Trap designed to IS EN 1825 Volume 5,000 lit

Tank Size: 3080mm x 1720mm
Height: 2350mm
Volume: 5000 liters
Weight: 3000 Kg.
(Tank Dim: ± 20mm. Weight: ± 30Kg.)

Note: See PDF for excavation details & safety regulations.

Note: Specify hole drilling requirements. All civil works by customer.

Note: Do NOT scale from drawings. Drawings for illustration purposes only.