



Bypass NSB - 010 - HH - 6" class 1 interceptor Volume 5,000 lit

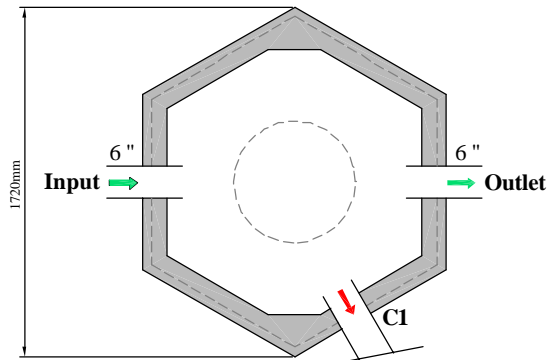


An anti-syphon vent is required for long run outflows

Max. length of bypass pipe 2m
110mm OD

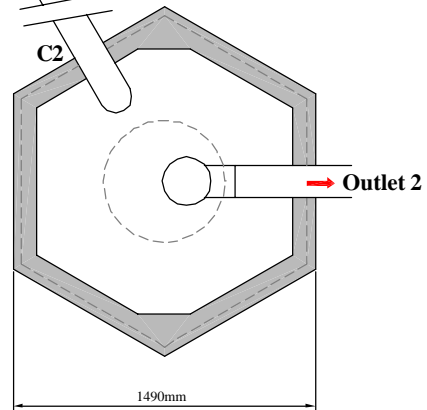


- 6 l/s nominal flow**
- 60 l/s peak flow**
- 3,333m sq. coverage**
- 400 lit. emergency oil retention**
- 1,000 lit. sludge capacity**

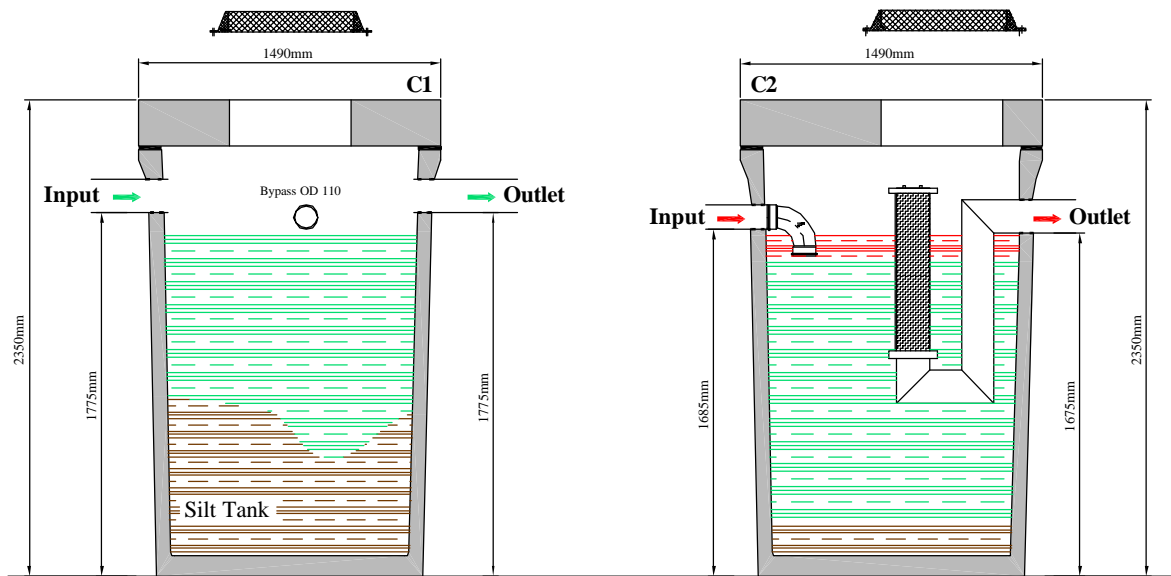

All tanks must be placed on a perfectly level and firm suitable base

This drawing is ©. All rights reserved.

<p>E-mail: info@molloyprecast.com Web: www.molloyprecast.com</p> 	<p>Molloy Precast Products Ltd. Coleraine, Clara Road, Tullamore, Co.Offaly. Tel: 05793 26000 Fax: 05793 26060</p>	<p>Interceptor Type: Bypass NSB-006-HH-hdp class 1 interceptor Volume 5,000 lit</p> <p>Tank Size: 1720mm x 1490mm each Height: 2350mm Volume: 2500 liters each Weight: 1500 Kg. each ex.lid (Tank Dim: ± 20mm. Weight: ± 30Kg.)</p>	<p>Note: See PDF for excavation details & safety regulations.</p> <p>Note: Specify hole drilling requirements. All civil works by customer.</p> <p>Note: Do NOT scale from drawings. Drawings for illustration purposes only.</p>
---	--	--	--