
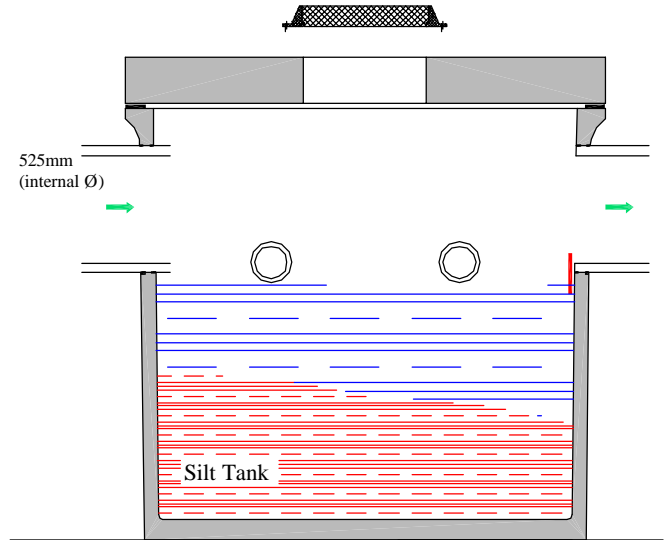



## Bypass NSB - 030 - CC - 600 - hdp interceptor Volume 16,000 lit

**30 l/s nominal flow**  
**300 l/s peak flow**  
**16,666m sq. coverage**  
**3,000 lit. sludge capacity**  
**1,000 lit. oil retention**

An anti-syphon vent is required for long run outflows

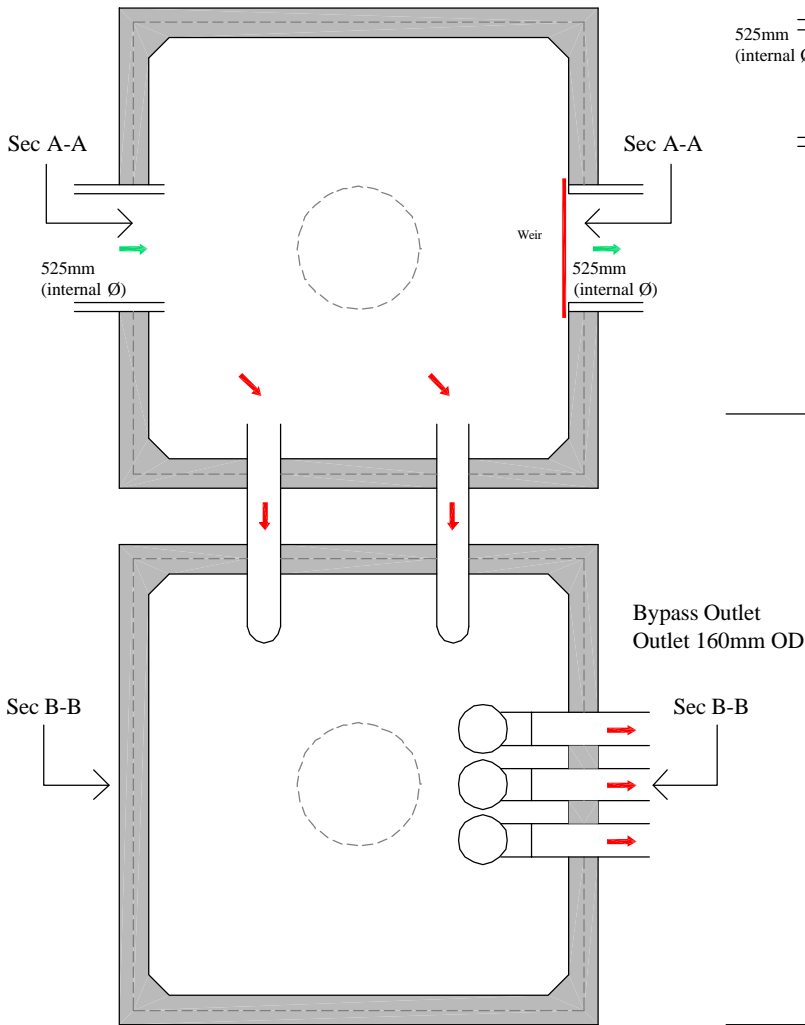

Sec A-A

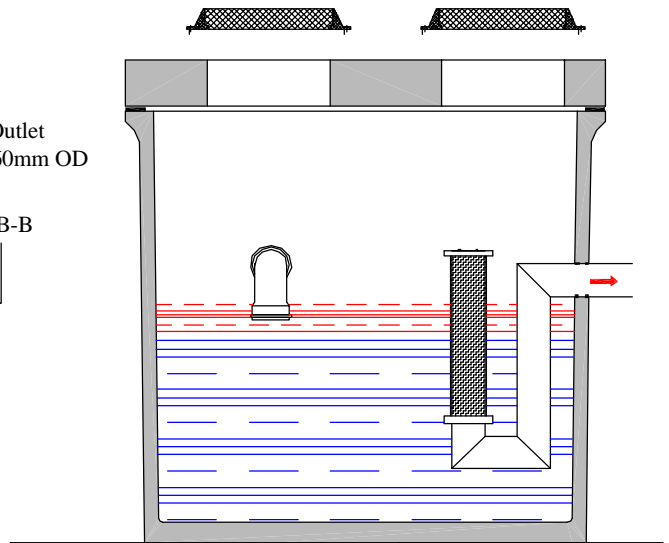

Sec B-B

The bypass may only join the main drain after a 110mm drop in level has occurred.

All tanks must be placed on a perfectly level and firm suitable base

This drawing is ©. All rights reserved.

E-mail: [info@molloyprecast.com](mailto:info@molloyprecast.com)  
 Web: [www.molloyprecast.com](http://www.molloyprecast.com)



Molloy Precast Products Ltd.  
 Coleraine, Clara Road,  
 Tullamore, Co.Offaly.  
 Tel: 05793 26000  
 Fax: 05793 26060

**Interceptor Type:** Bypass NSB-030-CC class 1 interceptor Volume 16,000 lit  
**Tank Size:** 2340mm x 2340mm each  
**Height:** 2350mm  
**Volume:** 8,000 liters each  
**Weight:** 4750 Kg. each ex.lid  
**(Tank Dim: ± 20mm. Weight: ± 30Kg.)**

**Note:** See PDF for excavation details & safety regulations.

**Note:** Specify hole drilling requirements. All civil works by customer.

**Note:** Do NOT scale from drawings. Drawings for illustration purposes only.