



## Forecourt Class 1 En 858 Industrial Interceptor FC - NS - 10 - CC

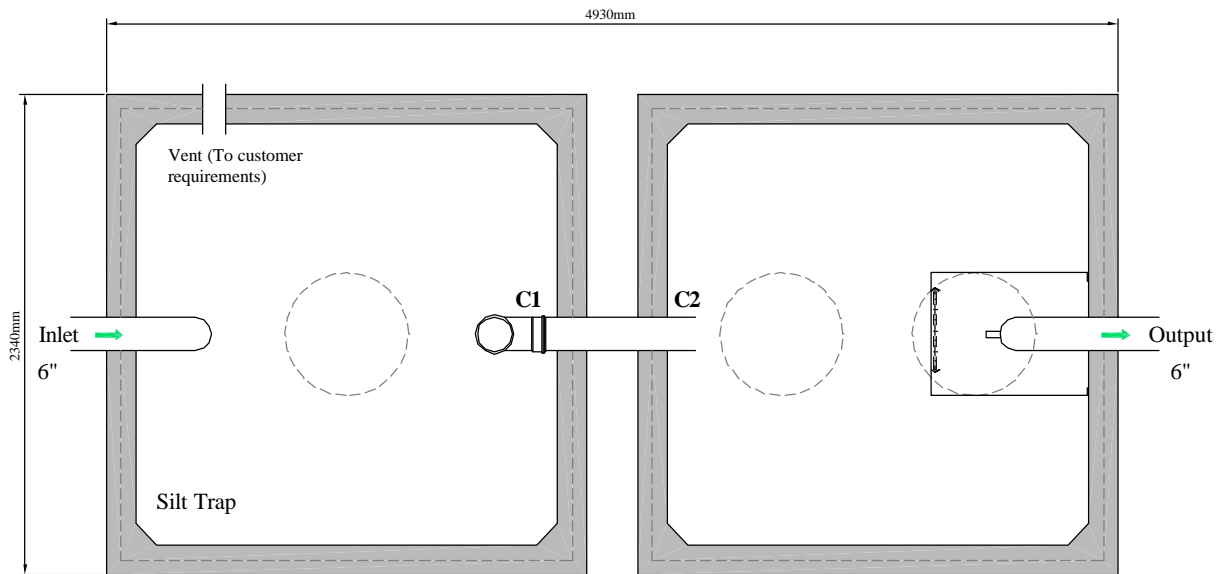

**10 l/s flow**  
**555m sq. coverage**  
**1,000 lit. silt capacity**  
**7,600 lit. emergency oil retention**

The bypass may only join the main drain after a 110mm drop in level has occurred.

An anti-syphon vent is required for long run outflows

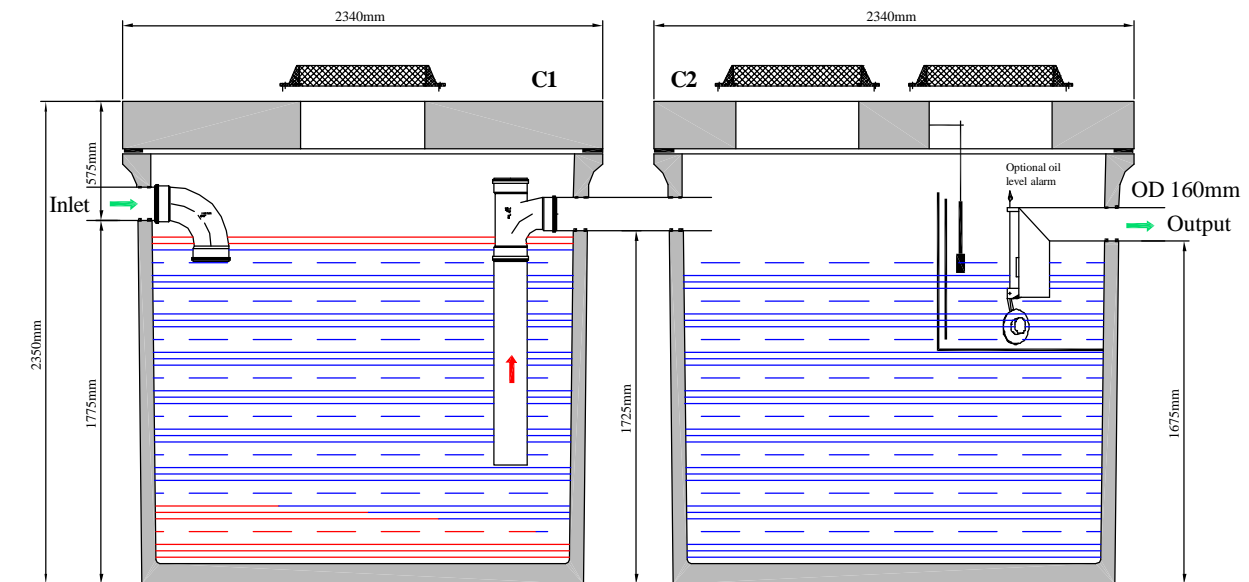

All tanks must be placed on a perfectly level and firm suitable base

This drawing is ©. All rights reserved.

E-mail: [info@molloyprecast.com](mailto:info@molloyprecast.com)  
 Web: [www.molloyprecast.com](http://www.molloyprecast.com)



Molloy Precast Products Ltd.  
 Coleraine, Clara Road,  
 Tullamore, Co.Offaly.  
 Tel: 05793 26000  
 Fax: 05793 26060

**Interceptor Type:** Forecourt Class 1  
 En 858 Industrial Interceptor FC-NS-10-CC  
**Tank Size:** 4930mm x 2340mm (Overall)  
**Height:** 2350mm  
**Volume:** 16,000 litres  
**Weight:** 9,500 Kg.  
 (Tank Dim: ± 20mm. Weight: ± 30Kg.)

**Note:** See PDF for excavation details & safety regulations.

**Note:** Specify hole drilling requirements. All civil works by customer.

**Note:** Do NOT scale from drawings. Drawings for illustration purposes only.