



**Full Retention Class 1 EN 858 FR-NS-10-CC Buderus Volume 16,000 lit**

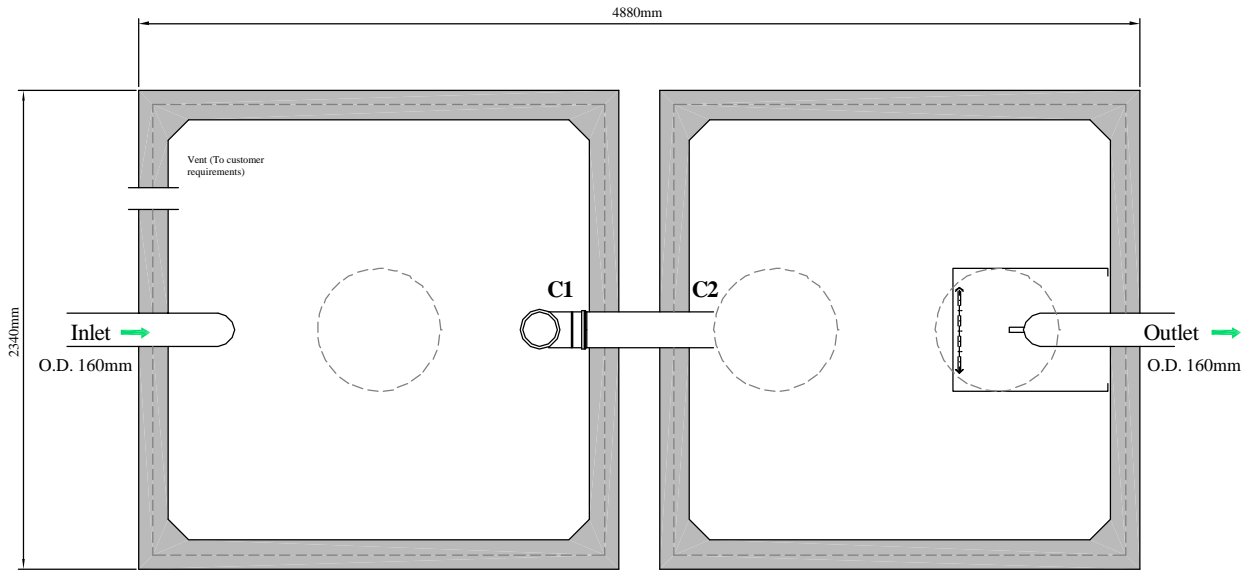


**10 l/s nominal flow**  
**555m sq. coverage**  
**6,000 lit. silt capacity**  
**1,600 lit. emergency oil retention.**

An anti-syphon vent is required for long run outflows

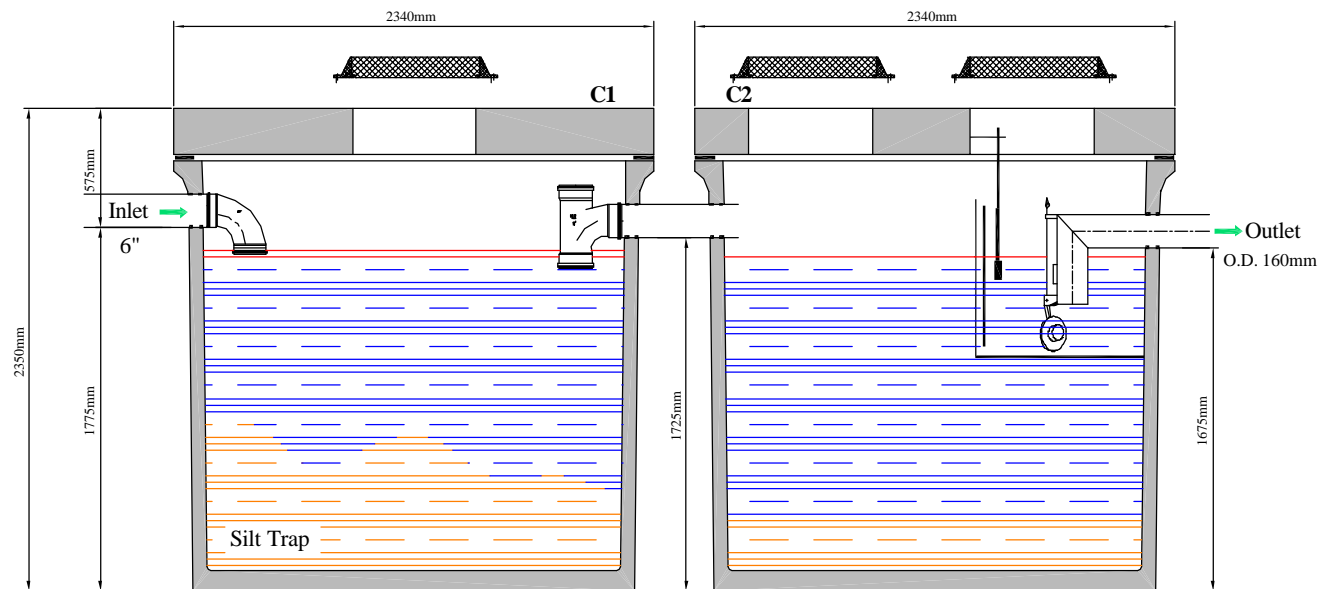

All tanks must be placed on a perfectly level and firm suitable base

This drawing is ©. All rights reserved.

<p>E-mail: <a href="mailto:info@molloyprecast.com">info@molloyprecast.com</a>                  Web: <a href="http://www.molloyprecast.com">www.molloyprecast.com</a></p>  <p><b>MOLLOY PRECAST</b></p>	<p>Molloy Precast Products Ltd.                  Coleraine, Clara Road,                  Tullamore, Co.Offaly                  Tel: 05793 26000                  Fax: 05793 26060</p>	<p><b>Interceptor Type:</b> Full Retention Class 1 EN 858 FR-NS-10-CC Buderus Volume 16,000L  <b>Tank Size:</b> 4880mm x 2340mm  <b>Height:</b> 2350mm  <b>Volume:</b> 16,000 liters  <b>Weight:</b> 9,500 Kg.                  (Tank Dim: ± 20mm. Weight: ± 30Kg.)</p>	<p><b>Note:</b> See PDF for excavation details &amp; safety regulations.  <b>Note:</b> Specify hole drilling requirements. All civil works by customer.  <b>Note:</b> Do NOT scale from drawings. Drawings for illustration purposes only.</p>
--	---	---	--