



Full Retention Class 1 EN 858 FR-NS-20-C-hdp Volume 8,000 lit

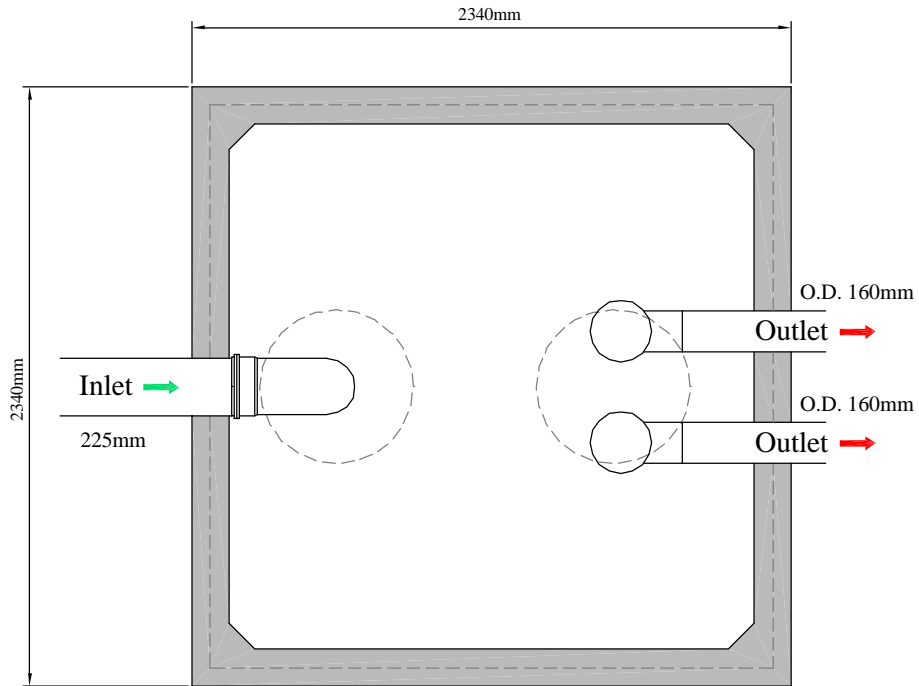

20 l/s nominal flow
1,110m sq. coverage
2,500 lit. silt capacity
1,000 lit. emergency oil retention.

An anti-syphon vent is required for long run outflows

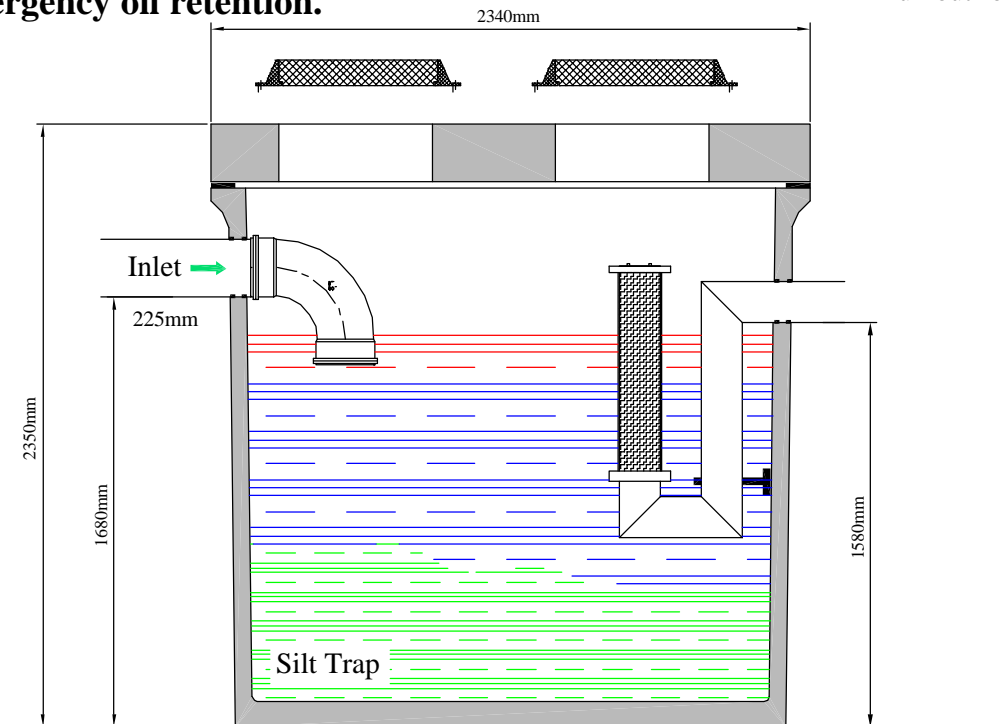

All tanks must be placed on a perfectly level and firm suitable base

This drawing is ©. All rights reserved.

<p>E-mail: info@molloyprecast.com Web: www.molloyprecast.com</p> <p>Aswaclear from MOLLOY PRECAST</p>	<p>Molloy Precast Products Ltd. Coleraine, Clara Road, Tullamore, Co.Offaly. Tel: 05793 26000 Fax:05793 26060</p>	<p>Interceptor Type: Full Retention Class 1 EN 858 FR-NS-20-C-hdp Volume 8,000L</p> <p>Tank Size: 2340mm x 2340mm Height: 2350mm Volume: 8,000 liters Weight: 4,750 Kg. (Tank Dim: ± 20mm. Weight: ± 30Kg.)</p>	<p>Note: See PDF for excavation details & safety regulations.</p> <p>Note: Specify hole drilling requirements. All civil works by customer.</p> <p>Note: Do NOT scale from drawings. Drawings for illustration purposes only.</p>
---	---	---	--