



Full Retention Class 1 EN 858 FR-NS-50-CC Buderus Volume 16,000 lit

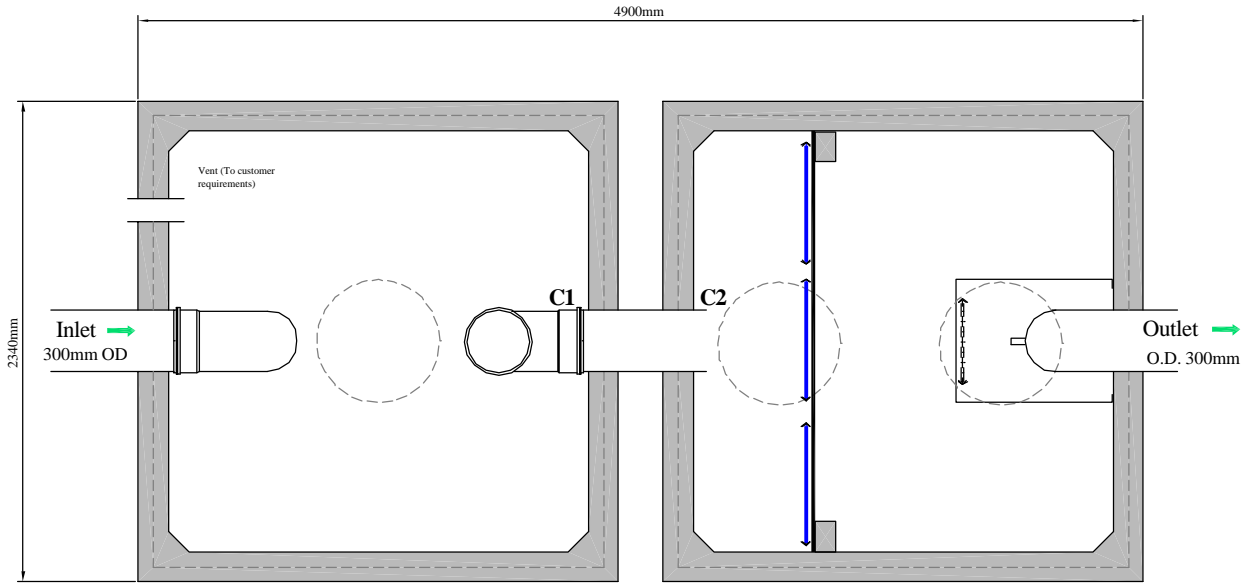


50 l/s nominal flow
2,773m sq. coverage
2,000 lit. silt capacity
4,000 lit. emergency oil retention.

An anti-syphon vent is required for long run outflows

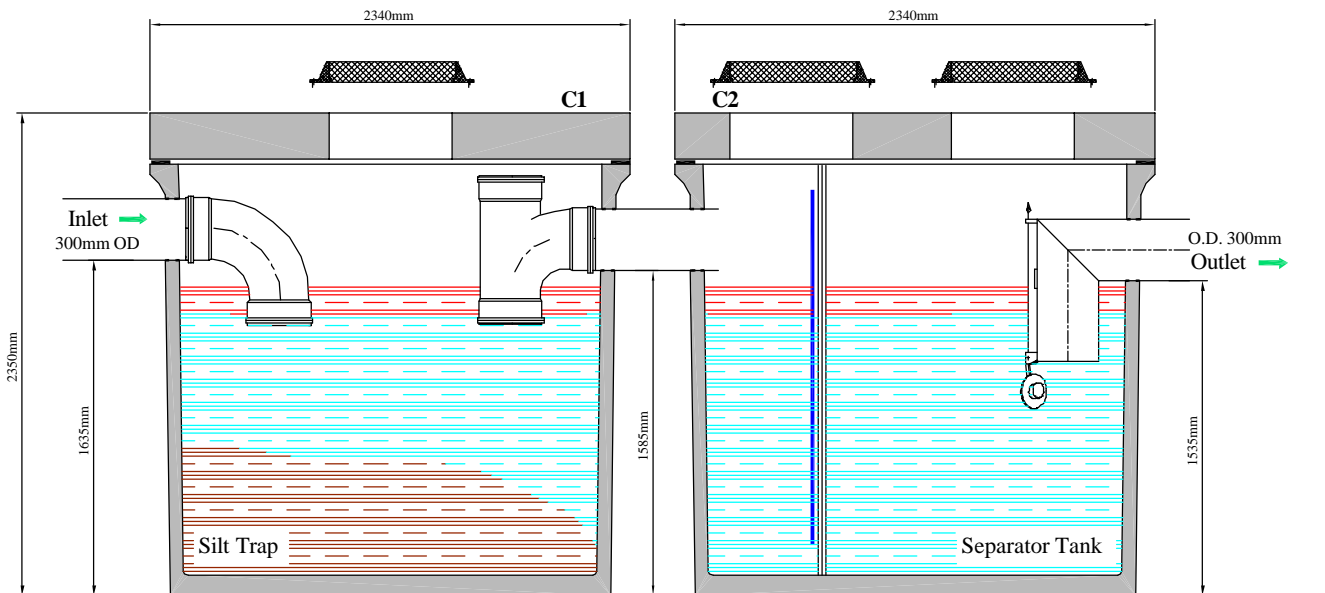

All tanks must be placed on a perfectly level and firm suitable base

This drawing is ©. All rights reserved.

<p>E-mail: info@molloyprecast.com Web: www.molloyprecast.com</p>  <p>from MOLLOY PRECAST</p>	<p>Molloy Precast Products Ltd. Coleraine, Clara Road, Tullamore, Co.Offaly. Tel: 05793 26000 Fax: 05793 26060</p>	<p>Interceptor Type: Full Retention Class 1 EN 858 FR-NS-50-CC Buderus Volume 16,000L</p> <p>Tank Size: 4900mm x 2340mm Height: 2350mm Volume: 16,000 liters Weight: 9,500 Kg. (Tank Dim: ± 20mm. Weight: ± 30Kg.)</p>	<p>Note: See PDF for excavation details & safety regulations.</p> <p>Note: Specify hole drilling requirements. All civil works by customer.</p> <p>Note: Do NOT scale from drawings. Drawings for illustration purposes only.</p>
---	--	--	--