



Full Retention Class 1 FR-NS-6-H hdp Volume 2,500 lit

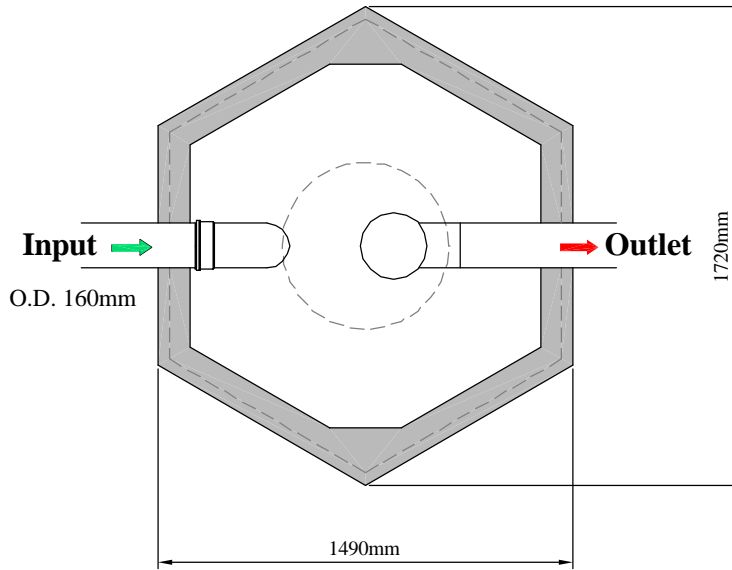


6 l/s flow
333m sq. coverage
400 lit. emergency oil retention
800 lit. silt capacity

An anti-syphon vent is required for long run outflows

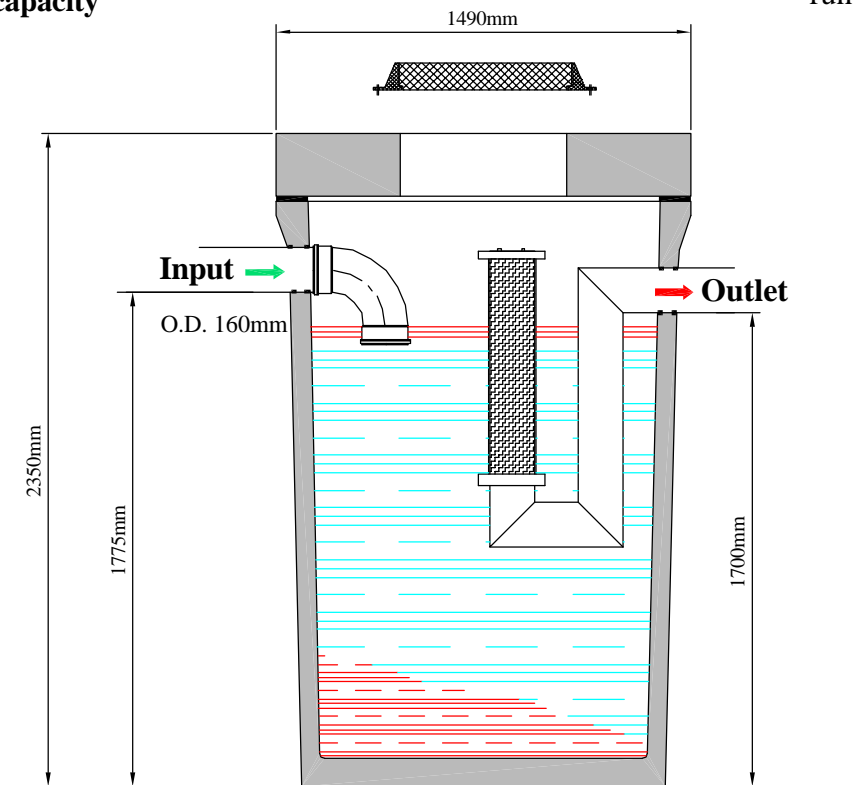

All tanks must be placed on a perfectly level and firm suitable base

This drawing is ©. All rights reserved.

<p>E-mail: info@molloyprecast.com Web: www.molloyprecast.com</p>  <p>from MOLLOY PRECAST</p>	<p>Molloy Precast Products Ltd. Coleraine, Clara Road, Tullamore, Co.Offaly. Tel: 05793 26000 Fax: 05793 26060</p>	<p>Interceptor Type: Full Retention class 1 FR-NS-6-H hdp Volume 2,500 lit Tank Size: 1720mm x 1490mm Height: 2350mm Volume: 2500 liters each Weight: 1500 Kg. (Tank Dim: ± 20mm. Weight: ± 30Kg.)</p>	<p>Note: See PDF for excavation details & safety regulations. Note: Specify hole drilling requirements. All civil works by customer. Note: Do NOT scale from drawings. Drawings for illustration purposes only.</p>
---	--	--	--