


SECTION

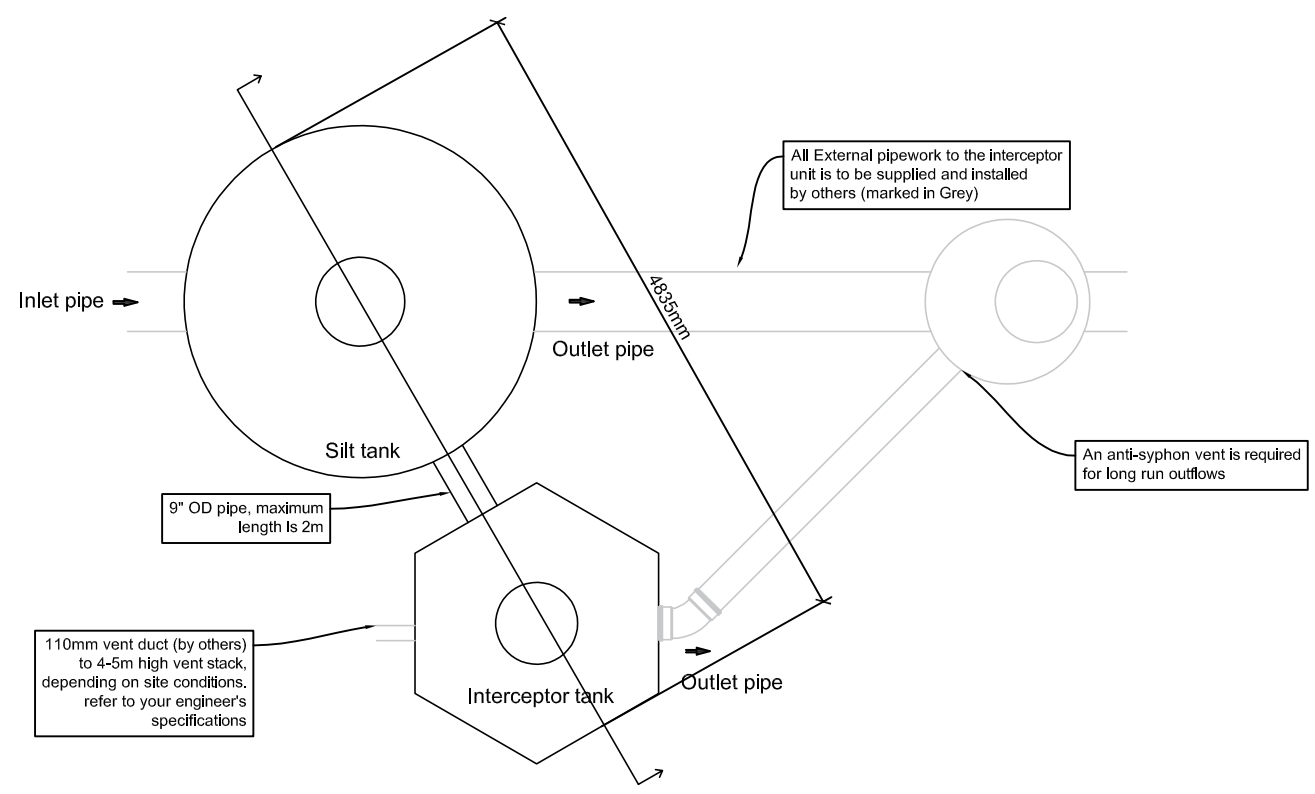

PLAN

Tank lifting limitations:
Max chain angle <math>< 60^\circ</math>

<math>< 60^\circ</math> $> 60^\circ$

Damage caused by incorrect lifting is the responsibility of others

- Notes:**
- Observe all safety regulations in regard to excavation and lifting requirements. Never leave opening uncovered or unattended at any time
 - Specify any specific requirements prior to ordering. All civil works by customer
 - Do not scale from this drawing. Only for illustration purposes

MOLLOY
ENVIRONMENTAL SYSTEMS
Clara Rd., Tullamore, Co. Offaly
T: 057 9326000 E: info@molloyprecast.com
F: 057 9326060 W: www.molloyprecast.com

Title: NSB20 by-pass Interceptor, EN858 Class 1
 Drg. no.: NSB20-S+H+-010219
 Nominal flow: 20 l/s
 Peak flow: 200 l/s
 Area coverage: 11,111 sq. m
 Max. silt capacity: 3,730 litres
 Max. emergency oil retention: 445 litres
 Date: 01/02/2019
 Drawn by: KR Checked by: MC, SF, OM